Bellows suction cups (round)



FSG 7 NBR-ESD-55 M5-AG

Part no..:10.01.06.04336

https://www.schmalz.com/10.01.06.04336


Home > Vacuum Technology for Automation > Vacuum Components > Vacuum Suction Cups > Bellows Suction Cups (Round) > Bellows Suction Cups FSG (2.5 Folds) > FSG 7 NBR-ESD-55 M5-AG

Bellows suction cup (round) for very uneven workpieces



Size: 7		
Suction cup material: Nitrile rubber NBR-ESD		
Material hardness [Shore A]: 55 Shore A		
Nipple material: Aluminum		
Connection: M5-M		
Number of folds: 2.5		
Vacuum connection: M5-M		

Design Data

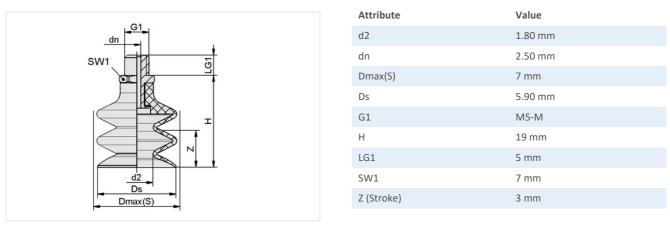

Note: Acceptable dimensional tolerances for elastomer parts concerning to DIN ISO 3302-1 M3

Technical Data

Attribute	Value
Suction cup material	Nitrile rubber NBR-ESD
Material hardness [Shore A]	55 Shore A
Size	7
Number of folds	2.50
Connection	M5-AG
Curve radius (min) (convex)	7.50 mm
Volume	0.04 cm ³

Bellows suction cups (round)



FSG 7 NBR-ESD-55 M5-AG

Part no..:10.01.06.04336

https://www.schmalz.com/10.01.06.04336

Suction force (-600mbar)	0.15 N
Pull-off force	0.90 N
Hose diameter (rec.) d	2 mm
Weight	1.60 g
Product family	FSG

Note: Suction force: The specified suction forces are theoretical values at a vacuum of -0.6 bar and with a dry, smooth and flat workpiece surface - they do not include a safety factor Pull-off force: The pull-off force of the versions made of natural rubber is reduced by about 40% Hose diameter: The recommended hose diameter refers to a hose length of approx. 2 m

Spare parts



FG 7 NBR-ESD-55 N062 Part no..:10.01.06.04139

Size: 7

Suction cup material: Nitrile rubber NBR-ESD Material hardness [Shore A]: 55 Shore A

Number of folds: 2.5



SA-NIP N062 M5-AG DN250 Part no..:10.01.06.05668

Thread G1: M5-M

Length L1: 15.9 mm

Fitting length: 5 mm

Nominal diameter dn: 2.5 mm

Material: Aluminum