

Vacuum hose (meter)

VSL 48-38 PU-DS-AS TR

Part no.:10.07.09.00031

<https://www.schmalz.com/10.07.09.00031>

Home > Vacuum Technology for Automation > Vacuum Components > Filters and Connections > Hoses and Connections > Vacuum / Compressed Air Hoses VSL > VSL 48-38 PU-DS-AS TR

Hose for vacuum and compressed-air systems



External diameter D: 48 mm

Internal diameter d: 38 mm

Length max.: 20 m


Material hose: PU, wire spiral, antistatic

Bending radius min.: 29 mm

Pressure range (operating pressure): -1.00 ... 3.21 bar

Operating temperature: -40 ... 90 °C

Design Data

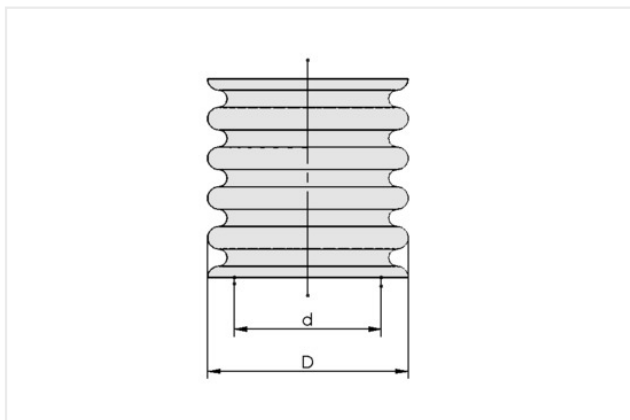

Attribute	Value
d	38 mm
D	48 mm

Technical Data

Attribute	Value
Hose type	48-38
Pressure range (operating pressure)	-1.00 ... 3.21 bar
Operating temperature	-40 ... 90 °C
Bending radius min.	29 mm
Length max.	20 m
Weight/Meter	520 g/m
Weight/Meter	0.52 kg/m
Material hose	PU, wire spiral, antistatic

Contact Schmalz

Oy Schmalz Ab | Taivaltie 5, 01610 Vantaa, Finland | +358 10 2312011 | schmalz@schmalz.fi

Vacuum hose (meter)

VSL 48-38 PU-DS-AS TR

Part no.:10.07.09.00031

<https://www.schmalz.com/10.07.09.00031>

Product family

VSL

Note: Operating pressure: In reference to media and ambient temperature of + 20 °C Min. bending radius: Referred to the inner side of the hose bend in a static state Max. length: Please indicate the tube length when placing the order!

Accessories



SSD 42-46 ST-VZ

Part no.:10.07.10.00156

Clamping range: 42.0 ... 46.0 mm

Material: Steel

Surface: galvanised



SSD 43-48 ST-VZ

Part no.:10.07.10.00020

Clamping range: 43.0 ... 48.0 mm

Material: Steel

Surface: galvanised



ST G1-1/2-AG 38 MS-V

Part no.:10.08.03.00170

Thread G1: G1-1/2"-M

Hose diameter (rec.) d: 38 mm

Material: Brass

Surface: nickel plated

Length L: 12.2 mm

Nominal diameter dn: 29.9 mm

Contact Schmalz

Oy Schmalz Ab | Taivaltie 5, 01610 Vantaa, Finland | +358 10 2312011 | schmalz@schmalz.fi



Vacuum hose (meter)

VSL 48-38 PU-DS-AS TR

Part no...:10.07.09.00031

<https://www.schmalz.com/10.07.09.00031>

Contact Schmalz

Oy Schmalz Ab | Taivaltie 5, 01610 Vantaa, Finland | +358 10 2312011 |
schmalz@schmalz.fi