

## Flow resistance

SW 50 G1/8-AG

Part no.:10.05.04.00002

<https://www.schmalz.com/10.05.04.00002>

Home > Vacuum Technology for Automation > Vacuum Components > Valve Technology > Check Valves and Flow Restrictors > Flow Restrictors SW  
> SW 50 G1/8-AG

### Flow resistor for reduction of the volume flow rate




Length L: 6 mm

Thread G1: G1/8"-M

Material: Aluminum

### Design Data

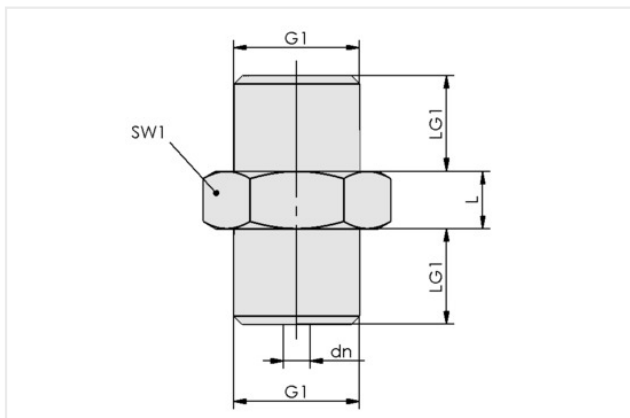

| Attribute | Value   |
|-----------|---------|
| G1        | G1/8"-M |
| dn        | 0.50 mm |
| L         | 6 mm    |
| LG1       | 9.50 mm |
| SW1       | 14 mm   |

### Technical Data

| Attribute                            | Value                  |
|--------------------------------------|------------------------|
| Evacuation rate for $p_u = -0,3$ bar | 0.13 m <sup>3</sup> /h |
| Evacuation rate for $p_u = -0,3$ bar | 2.20 l/min             |
| Evacuation rate for $p_u = -0,6$ bar | 0.15 m <sup>3</sup> /h |
| Evacuation rate for $p_u = -0,6$ bar | 2.50 l/min             |
| Weight                               | 5 g                    |
| Product family                       | SW                     |

### Contact Schmalz

Schmalz S.r.l. a Socio Unico | Via Ticino 105, 28066 Galliate (NO), Italy | +39 0321 62 15 10 | [schmalz@schmalz.it](mailto:schmalz@schmalz.it)